


2x4(2x8) PM PLC Splitter

Features	
Wide Bandwidth Low Insertion Loss Good Uniformity High Reliability	
Applications	
Communcations Fiber sensor	

Specifications

Parameter	Unit	PM PLC splitter	
		2x4	2x8
Port		2x4	2x8
Operating Wavelength	nm	1310,1550	
Insertion Loss	dB	≤7.6	≤11.0
Uniformity	dB	≤1.0	≤1.2
PER	dB	≥18	≥18
Directivity	dB	≥50	
Return Loss	dB	≥50	
Fiber Type		PM Fiber	
Operating Temperature	°C	-10~ +85	
Storage Temperature	°C	-40~ +85	
Package Dimensions(for bare fiber)		4x4x50	4x4x50
Package Dimensions(for 0.9mm tube)		4x7x60	4x7x60

Package Dimensions

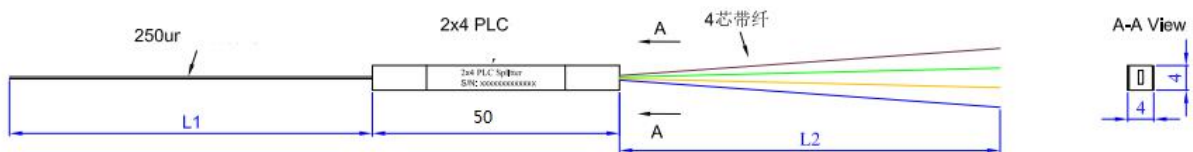

Ordering Information

PMP LC	Port	Wavelength	pigtail	Fiber	Length	Connector
	24=2x4 28=2x8	1550 1310	0=250um bare fiber 1=900um loose tube	5=Panda fiber	8=0.8 S=Specify	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others