


## Multimode Fiber Pump Combiner

Type	Working WL (nm)	Input pump	Output fiber	Pump Effi.	Per Pump Power(W)
2X1	800-1000	105/125 0.15	105/125 0.22	85%	20
3x1	800-1000	105/125 0.22	200/220 0.22	90%	20
3x1	800-1000	200/220 0.22	400/440 0.22	90%	20
4x1	800-1000	SMF-28e	62.5/125	90%	20
4x1	800-1000	105/125 0.22	x/125 DC	95%	20
7x1	800-1000	105/125 0.15	200/220 0.22	90%	20
7x1	800-1000	105/125 0.22	x/125 DC	90%	20

\* Input pump and output pump fiber can be customized

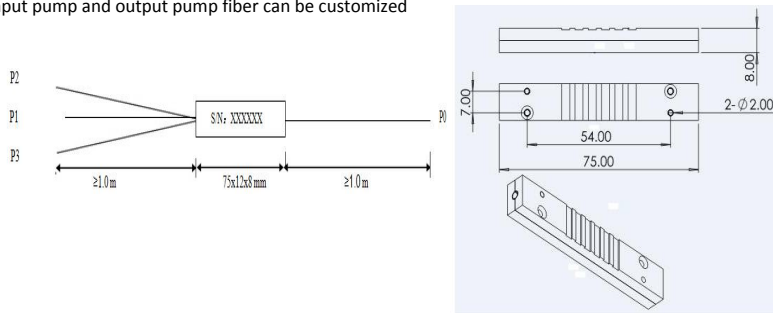

Order Information :

MPC	Port	Pump Fiber	Output fiber	Package
	2x1	22=105/125 NA0.2	20=220/220	1=OD4x65mm
	3x1	15=105/125 NA 0.	40=400/440	2=Aluminium box
	4x1	01=SMF-28e	22=105/125 NA0.22	
	7x1	02=50/125	SS=X/125DC	
		03=62.5/125		