

Optical Fiber Mirror


Features	
Low Insertion Loss	
Compact Size	
Environmental Stability	
Application	
DWDM Systems	
Fiber Instruments	
Fiber Sensors	

Specifications:

Parameter	Value	
Operating Wavelength (nm)	1310nm 1550nm 1625nm	1064nm ,980 nm
Operating Bandwidth (nm)	±30	± 30
Insertion loss (dB)	≤0.5 (Typ. 0.3)	≤0.6 (Typ. 0.4)
PDL (dB)	≤0.05	≤0.05
Power handling (mW)	≤500	≤300
Fiber Type	SMF-28e	Hi1060
Operating temperature(°C)	-5 ~ +70	-5 ~ +50
Storage temperature(°C)	-40~ +85	-40 ~ +85
Package dimensions(mm)	Φ4.5x25	Φ5.5x35

Above specification are for devices without connector ,For device with connector, IL is 0.3dB higher, RL is 5 dB lower.

Package Dimensions:

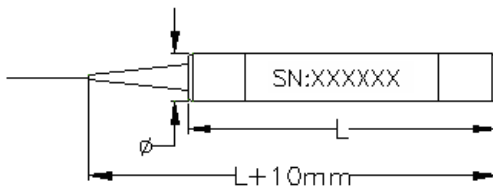

Ordering Information:

OFM	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Size
	1310=1310 1550=1550 1064=1064 1625=1625 980=980	0= 250um bare fiber 1= 900um loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC ST=ST/UPC LC=LC/UPC XX=Other	25=Φ4.5x25 35=5.5x35