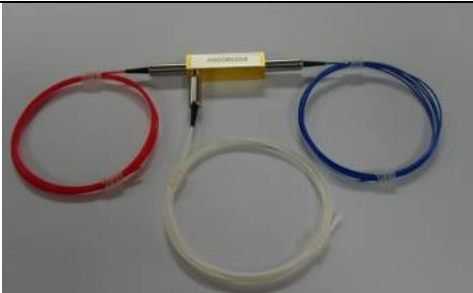



Optical Circulator - Polarization Insensitive 3 Port 1064nm

Features	
High isolation & High Return Loss Low insertion loss & PDL	
Applications	
Fiber Laser Laboratory	

Specifications

Parameter \ Type	3 Port
Operating wavelength (nm)	1064
Bandwidth(nm)	± 5
Isolation(dB)	≥ 20 (Typ.25dB)
Insertion Loss (dB)	≤ 2.1 (Typ 1.8)
PDL (dB)	≤ 0.2
Return loss (dB)	≥ 50
Cross Talk (dB)	≥ 45
Power handling (mW)	≤ 300
Fiber Type	HI1060
Operating temperature (°C)	0 ~ +70
Storage temperature (°C)	-40 ~ +85
Dimensions (mm)	34x8.4x8.4

Package Dimension

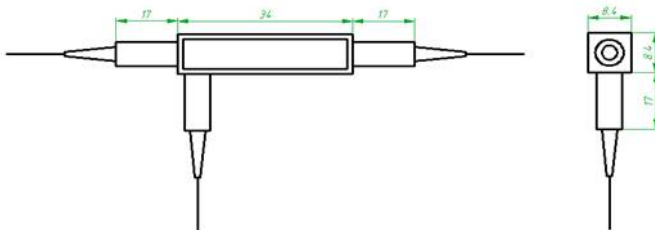

Ordering Information

CIR	Type	Wavelength	Pigtail Type	Length	Fiber Type	Connector	Package
	3=3 Port	1064=1064	0=250um bare fiber 1=900um loose tube 3=3mm loose tube 2=2mm loose tube	0.8=0.8m 1=1m	4=HI1060	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others	34=34x8.4x8.4