

Polarization Maintaining Isolator for 1310,1480,1550nm

Features	
Low Insertion Loss	
Low Extinction Ratio & High Isolation	
High stability and reliability	
Application	
EDFA	
Fiber Optical Instrument	
Fiber Sensor	

Specifications


Type		Single Grade		Dual Grade	
Parameter		P	A	P	A
Operating Wavelength (nm)		1310,1480, 1550,1610,1650			
Bandwidth (nm)		±20			
Peak isolation (dB)		42	40	58	55
Isolation (at 23℃) (dB)		≥28	≥26	≥48	≥45
Typ. Insertion Loss (at 23℃)		0.4	0.5	0.5	0.6
Insertion Loss (at-5 ~ +70 ℃)		≤0.55	≤0.65	≤0.65	≤0.80
Extinction Ratio (dB)	Type B (Both of axis working)	≥20	≥18	≥20	≥18
	Type F (Fast axis blocked)	≥22	≥20	≥22	≥20
Return loss (Input/Output) (dB)		≥55			
Power handling (mW, CW)		≤300			
Fiber Type		panda Fiber.			
Operating temperature (℃)		-5~+70			
Storage temperature (℃)		-40 ~ +80			
Dimensions (mm)		φ5.5×L35 or 3.0x25			

*Above specifications are for devices without the connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

*The PM fiber and the connector key are aligned to the slow axis

Package Dimensions

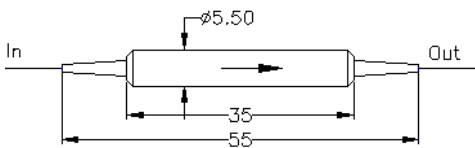

Ordering Information:

PMI S	Type	Grade	Wave length	Axis Alignment	Pigtail	Fiber Type	Length	Connector	Dimensions
	S= Single stage D = Dual Stage	P A	1310 1480 1550 1610 1650	B=Both Axis Working F=Slow axis working ,Fast Axis Blocked	0=250um bare fiber 1=900um loose tube	5=P anda fiber	0.8= 0.8m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other	5=5.5x35mm 3=3.0x25mm